
TECHNICAL DATA SHEET · METAL HOSES

Steel hose

Suction hose made of profiled galvanised steel strip with an interlocked profile and a special fibre seal. Wear-resistant and electrically conductive, for temperatures up to +120 °C.

0 to +120 °C | ATEX zone 20, 21, 22 | Electrically conductive | Wear-resistant

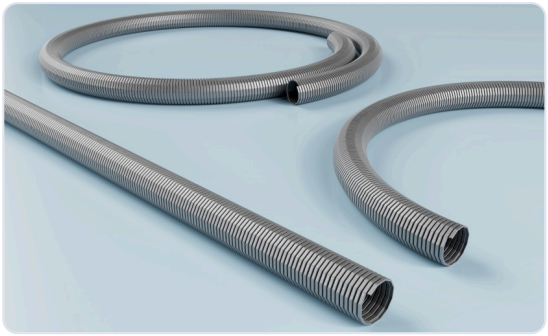

Specifications

Material	Galvanised steel
Construction	Profiled steel strip with interlocked profile
Seal	Special fibre
Temperature range	0 to +120 °C
ATEX	Zone 20, 21 and 22 inside, in accordance with 2014/34/EU and TRGS 727
Standards	RoHS and REACH compliant
Supply	Length up to 10 m in one piece

Applications

- Material conveying
- Extraction units
- Dust extraction and filter systems
- Wood dust extraction
- Oil mist extraction

Other diameter or length?
Contact us and we will see what is possible.

Sizes

Item number	Inside ø mm	Outside ø mm	Bend radius mm	Weight kg/m
SLG-38-STL	38	42	136	–
SLG-40-STL	40	45	135	0.70
SLG-45-STL	45	50	143	0.73
SLG-50-STL	50	55	155	0.81
SLG-60-STL	60	66	185	1.01
SLG-70-STL	70	76	205	1.17
SLG-80-STL	80	86	230	1.33
SLG-90-STL	90	97	235	1.78
SLG-100-STL	100	107	270	1.98
SLG-110-STL	110	117	275	2.17
SLG-120-STL	120	127	320	2.36
SLG-125-STL	125	132	338	2.45

The bend radius is measured on the inside of the bend.

Sebatec B.V. · Disketteweg 14, 1033 NW Amsterdam
+31 (0)20 223 63 25 · info@sebatec.nl · **sebatec.nl**

This data sheet has been compiled with care. No rights can be derived from the data. Subject to technical changes.
Version 27 October 2026